



NOVATEC®

RIDE WITH SPEED AND ADVENTURE

WHEELS 2024 CATALOGUE

WWW.NOVATECWHEELS.COM

NOVATEC

2024 WHEELS

WWW.NOVATECWHEELS.COM

HARNESS THE POWER:

**SPEED
EXPLORE
CONQUER!**



NOVATEC
QUALITY • PERFORMANCE • RELIABILITY



CONTENTS

TABLE OF

03
TECHNOLOGY

32
PARTS

39
GLOBAL



09 ROAD DISC

| | |
|-------------|-----|
| R3 DISC | P10 |
| R4 DISC | P11 |
| R5 DISC | P13 |
| JETFLY DISC | P15 |
| N25 | P17 |
| G24 | P19 |

04

| | |
|-----------|-----|
| R5 | P05 |
| JETFLY SL | P06 |
| JETFLY | P07 |

ROAD



OFFROAD

20

| | |
|-----------|------|
| M30 | P.21 |
| FLOWTRAIL | P.23 |
| DIABLO | P.25 |
| DIABLO XL | P.27 |
| DEMON XL | P.29 |
| CRISP | P.31 |



TECHNOLOGY



MATRISILK

REINFORCEMENT FIBERS EMBEDDED INTO THE CARBON FABRIC YIELDING A MATRIX STRUCTURE THAT INCREASES STRENGTH & FATIGUE LIFE



HYPERTOROID

OPTIMIZED CROSS-SECTIONAL SHAPE MEANS EXCELLENT FRONTAL AERODYNAMICS & MINIMIZED LATERAL TURBULENCE



PROTEX

PROPRIETARY COATING IMPREGNATED INTO THE BRAKE TRACK OF OUR CARBON RIMS FOR ENHANCED ALL-WEATHER PERFORMANCE



TUBELESS READY

PROPRIETARY RIM PROFILE THAT IS COMPATIBLE WITH TUBELESS TIRE SYSTEMS WITHOUT THE NEED FOR LIQUID SEALANT



A.B.G.

ANTI-BITE GUARD IS A REINFORCED STEEL RIB INTEGRATED INTO ALLOY CASSETTE BODY SPLINES TO MITIGATE DAMAGE FROM DRIVE FORCES



4 IN 1

PROPRIETARY HUB TECHNOLOGY ALLOWING CONVERSION FROM STANDARD QR, 9MM, 15MM & 20MM AXLES (FRONT) & QR, 10MM, 12MM & X12 AXLES



UNIQUE 3 IN 1

PROPRIETARY REAR HUB TECHNOLOGY ALLOWING COMPATIBILITY WITH SHIMANO, SRAM & CAMPAGNOLO CASSETTE BODIES



SEALED BEARING

TOP QUALITY JAPANESE MADE SEALED BEARINGS ENSURE THAT NOVATEC WHEELS ROLL FAST & FRICTION-FREE



REPLACEABLE BEARINGS

DOUBLE & QUAD BEARING CONFIGURATIONS ARE REPLACEABLE SHOULD THEY WEAR OUT - NOT THAT WE EXPECT THAT TO HAPPEN



HAND BUILT

ASSURANCE THAT THE WHEELSET DISPLAYING THIS MARK WAS HAND BUILT & TENSIONED BY A SKILLED & DEDICATED NOVATEC EXPERT WHEEL BUILDER

ROAD

R5/JETFLY SL/JETFLY





R5

- VERSATILE 50MM DEEP, WIDE PROFILE FULL CARBON RIM
- SUPER HIGH TEMPERATURE TG RESIN PREVENTS HEAT DISTORTION
- HYPERTOROID OPTIMIZED CROSS SECTIONAL SHAPE
- HAND BUILT WITH STAINLESS AERO SPOKES & DSN NIPPLES
- ALSO AVAILABLE IN DISC CONFIGURATION
- CLINCHER: 1,558 GRAMS/PAIR



CLINCHER




JETFLY SL

CRAFTED WITH PRECISION, THIS ULTRA-LIGHTWEIGHT ALLOY WHEELSET FEATURES A SLEEK 23.4MM LOW-PROFILE DESIGN, PERFECT FOR BOTH INTENSE RACES AND RIGOROUS TRAINING SESSIONS.



- FULL ALLOY RIMS WITH MACHINED BRAKING SURFACE
- MINIMAL WEIGHT MAKES THEM CLIMB LIKE A MOUNTAIN GOAT
- UNIQUE 3-IN-1 REAR HUB FOR EASY COMPATIBILITY WITH SHIMANO, SRAM & CAMPY
- TUBELESS READY PROFILE
- DSN NIPPLES
- CLINCHER : 1,564 GRAMS/PAIR
JETFLY-SL : 1,343 GRAMS/PAIR



JETFLY-SL CLINCHER




JETFLY



THE PERFECT WHEEL FOR A TRAINING RIDE, JETFLY'S 32MM-DEEP SECTION RIM FEELS LIKE RIDING ON A KNIFE-EDGE.

- FULL ALLOY RIMS WITH MACHINED BRAKING SURFACE
- MINIMAL WEIGHT MAKES THEM CLIMB LIKE A MOUNTAIN GOAT
- UNIQUE 3-IN-1 REAR HUB FOR EASY COMPATIBILITY WITH SHIMANO, SRAM & CAMPY
- TUBELESS READY PROFILE
- DSN NIPPLES
- CLINCHER : 1,564 GRAMS/PAIR
- JETFLY-SL : 1,343 GRAMS/PAIR



JETFLY CLINCHER



NOVATEC

WWW.NOVATEC.COM

NOVATEC

ESTRELLA





ROAD DISC

**R3 DISC/R4 DISC/R5 DISC/
G24/JETFLY DISC**


R3 DISC

THE NEW UPDATED R3 DISC WHEELSET TO KEEP UP WITH THE CURRENT TRENDS. WE'VE WIDENED THE INTERNAL RIM WIDTH TO 21MM WITH TUBELESS READY GIVING YOUR TIRES A LITTLE MORE ROOM AND DECREASED THE RIM HEIGHT TO 35MM FROM 38MM KEEPS THESE IN REGULAR ROTATION THROUGHOUT YOUR BIKE STABLE SO IT'S NO PROBLEM BEING YOUR EVERYDAY WHEELSET.

- AN IDEAL, DO-EVERYTHING, 35MM DEEP, WIDE PROFILE FULL CARBON RIM
- MEDIUM DEPTH IS IDEAL BALANCE BETWEEN RIGIDITY & ON-ROAD COMPLIANCE
- HAND BUILT WITH STAINLESS TRIPLE SPOKES & DSN NIPPLES
- ALSO AVAILABLE IN DISC CONFIGURATION WITH ASYMMETRIC RIM FOR STRENGTH
- CLINCHER: 1,520 GRAMS/PAIR LATERAL



(CLINCHER U3.0) ASYMMETRIC RIM



CLINCHER




R4 DISC



OUR R4 DISC WHEELSET IS A NEW ADDITION TO OUR DISC CARBON WHEEL COLLECTION. AN IN-BETWEEN OUR R3D AND R5D WITH A RIM HEIGHT OF 45MM AND AN INTERNAL WIDTH UP TO 21MM WITH TUBELESS READY, THE R4 WHEELSET IS PERFECT FOR THE SERIOUS CYCLIST. WITH A RIM WEIGHT OF 470G, THE ROTATIONAL WEIGHT IS MINIMAL, AND OUR CLASSIC R SERIES SHAPE STAYS TRUE TO RACE AERO DYNAMICS. AVAILABLE WITH CENTERLOCK ONLY.

- AN IDEAL, DO-EVERYTHING, 45MM DEEP, WIDE PROFILE FULL CARBON RIM
- MEDIUM DEPTH IS IDEAL BALANCE BETWEEN RIGIDITY & ON-ROAD COMPLIANCE
- HAND BUILT WITH STAINLESS TRIPLE SPOKES & DSN NIPPLES
- CLINCHER: 1,578 GRAMS/PAIR




CLINCHER



R5 DISC



R5D FEATURING A 50MM RIM HEIGHT, IT'S TAILOR-MADE FOR HIGH-SPEED CRUISING ON FLAT ROADS. EXPERIENCE UNRIVALED STABILITY AND STREAMLINED AERODYNAMICS, DELIVERING AN UNPARALLELED RIDE. PERFECT FOR FLAT ROAD CRUISING, RACING, AND TRAINING.



CLINCHER

- AN IDEAL, DO-EVERYTHING, 50MM DEEP, WIDE PROFILE FULL CARBON RIM
- MEDIUM DEPTH IS IDEAL BALANCE BETWEEN RIGIDITY & ON-ROAD COMPLIANCE
- HAND BUILT WITH STAINLESS TRIPLE SPOKES & DSN NIPPLES
- CLINCHER: 1,588 GRAMS/PAIR








JETFLY DISC

(CLINCHER U4.0)

THE JETFLY DISC IS OUR TRIED-AND-TRUE ALLOY ROAD DISC WHEELSET. WHETHER YOU ARE OUT FOR A LONG TRAINING RIDE OR EXPLORING NEW ROUTES, THE JETFLY DISC CAN DO IT ALL. DUE TO THE VERSATILITY OF THIS WHEELSET, WE ARE NOW OFFERING THEM IN CENTERLOCK ONLY. THE INTERNAL WIDTH COMES WITH 20MM AND STILL OFFER IN TUBELESS READY.

- NEW WIDE PROFILE SUPERLIGHT ALLOY RIM
- ANTI-BITE GUARD (ABG) CASSETTE BODY
- RACE LEVEL FEATURES AND PERFORMANCE
- UNIQUE 3-IN-1 REAR HUB FOR EASY COMPATIBILITY WITH SHIMANO, SRAM & CAMPY
- TUBELESS READY PROFILE
- DSN NIPPLES
- CLINCHER : 1,714 GRAMS/PAIR



CLINCHER




DISC



N25



- FULL ALLOY RIMS WITH MACHINED BRAKING SURFACE
- MEDIUM DEPTH IS IDEAL BALANCE BETWEEN RIGIDITY & ON-ROAD COMPLIANCE
- HAND BUILT WITH STAINLESS AERO SPOKES & DSN NIPPLES
- TUBELESS READY PROFILE
- CLINCHER: 2216 GRAMS/PAIR

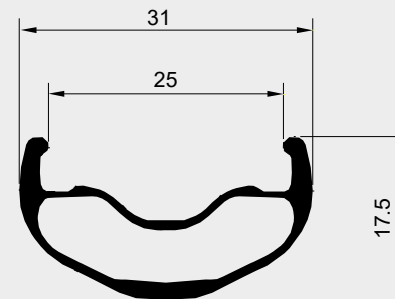

CLINCHER






- AN IDEAL, DO-EVERYTHING, 28MM DEEP, WIDE PROFILE FULL CARBON RIM
- MEDIUM DEPTH IS IDEAL BALANCE BETWEEN RIGIDITY & ON-ROAD COMPLIANCE
- HAND BUILT WITH STAINLESS TRIPLE SPOKES & DSN NIPPLES
- HOOKLESS/TUBELESS READY PROFILE
- CLINCHER: 1,565 GRAMS/PAIR



G24



OFFROAD

M30/FLOWTRAIL/DIABLO/
DIABLO XL/DEMON XL/CRISP




M30

27.5"/29"

ALL MOUNTAIN
ENDURO

TAILORED FOR ALL MOUNTAIN AND ENDURO RIDING, WITH TWO STRENGTH VARIANTS AVAILABLE. THE HOOKLESS RIM DESIGN MAXIMIZES AIR SPACE FOR SUPERIOR SHOCK ABSORPTION. WITH A 30MM INNER RIM WIDTH, IT ACCOMMODATES VARIOUS TIRE SIZES, PROVIDING A SEAMLESS AND RELIABLE OFF-ROAD ADVENTURE.

- TRAIL POUNDING 30MM INNER WIDTH
- TUBELESS READY MICROPEENED RIM PROFILE
- HEAT CURED GRAPHICS ARE LIGHT & CAN WITHSTAND HARD OFF ROAD ABUSE
- AVAILABLE IN 27.5" & 29" RIM DIAMETERS
- DSN NIPPLES
- M30 27.5" ALL MOUNTAIN: 1,885 GRAMS/PAIR
- M30 27.5" ENDURO: 1,935 GRAMS/PAIR
- M30 29" ALL MOUNTAIN: 1,962 GRAMS/PAIR
- M30 29" ENDURO: 2,032 GRAMS/PAIR
- AVAILABLE IN AND BOOST SPACING



CLINCHER



M30 29" | M30 29" ALL MOUNTAIN
M30 29" ENDURO

MOUNTAIN ENDURO

M30 27.5" | M30 27.5" ALL MOUNTAIN
M30 27.5" ENDURO



FLOWTRAIL 29" BOOST

FLOWTRAIL




FLOWTRAIL 27.5" BOOST

THE NAME SAYS IT ALL. FLOWTRAIL IS A PERFECT BLEND OF GRAVITY-BIASED & GO-ANYWHERE PERSONALITIES. LIGHT ENOUGH FOR CROSS COUNTRY, RESILIENT ENOUGH FOR ENDURO & PERFECT FOR EVERYDAY, FLOWTRAIL LETS YOU FIND RHYTHM ON YOUR RIDE.

- TUBELESS READY PROFILE - NO MORE PINCH FLATS FOR WHEN THE GOING GETS ROUGH
- 4-IN-1 FRONT HUB EASILY CONVERTS FROM QR, 9MM, 15MM & 20MM AXLES
- AN ALL NEW WIDE PARABOLIC RIM CROSS SECTION RESULTS IN IMPROVED TIRE SHAPING WHILE DISSIPATING FORCES MORE EVENLY ACROSS THE RIM STRUCTURE
- SLEEVED RIM JOINT IS STRONGER THAN A WELDED JOINT & DOES NOT HEAT DAMAGE THE RIM
- A.B.G. FORTIFIED ALLOY CASSETTE BODY RESISTS DAMAGE FROM DRIVE FORCES
- AVAILABLE IN 27.5 & 29 RIM DIAMETERS
- DSN NIPPLES
- FLOWTRAIL 27.5 BOOST: 1,777 GRAMS/PAIR
FLOWTRAIL 29 BOOST: 1,830 GRAMS/PAIR
- AVAILABLE IN STANDARD AND BOOST SPACING

FLOWTRAIL



CLINCHER



DIABLO



DIABLO 27.5"




DIABLO 29"





DIABLO LIVES SILENTLY IN THE NOVATEC STABLE SOMEWHERE BETWEEN THE LOAMY TRAILS OF MISTY MOUNTAIN BLISS & THE CHAOS OF GRAVITY-FED ALPINE DESCENTS. RACKING UP PODIUM AFTER PODIUM, DIABLO IS THE WINNINGEST OFFROAD WHEELSET IN OUR LINEUP.

- TRAIL POUNDING 23MM INNER WIDTH
- TUBELESS READY MICROPEENED RIM PROFILE
- 4-IN-1 FRONT HUB FOR COMPATIBILITY WITH QR, 9MM, 15MM & 20MM FRONT AXLE SYSTEMS
- HEAT CURED GRAPHICS ARE LIGHT & CAN WITHSTAND HARD OFF ROAD ABUSE
- AVAILABLE IN 27.5 & 29 RIM DIAMETERS
- DSN NIPPLES
- DIABLO 27.5: 1,873 GRAMS/PAIR
DIABLO 29: 1,969 GRAMS/PAIR
- AVAILABLE IN STANDARD AND BOOST SPACING



CLINCHER



DIABLO




DIABLO XL 29"

DIABLO XL

HARD CORE HAS NOTHING ON THE DIABLO XL. IF OUR GRAVITY WHEELS ARE BOMBPROOF THEN THE DIABLO XL IS THE BOMB - WIDER, STRONGER, AND FASTER OVER ANY DH COURSE YOU THROW AT IT

- BOOST ONLY FRONT AND REAR HUB
- 30MM INNER WIDTH
- ENDURO PLUS 35MM WIDTH
- TUBELESS READY MICROPEENED RIM PROFILE
- HEAT CURED GRAPHICS ARE LIGHT & CAN WITHSTAND HARD OFF ROAD ABUSE
- DSN NIPPLES
- DIABLO XL 275 BOOST: 2,048 GRAMS/PAIR
- DIABLO XL 29: 2,134 GRAMS/PAIR



CLINCHER



DIABLO XL 27.5" BOOST




DEMON

THE PLACE WHERE YOU CHEERS YOUR CREW FOR EVERYTHING YOUR THANKFUL FOR, FLIP THE FUN SWITCHES AND JUST BEFORE YOU POINT YOUR RIG INTO THE VOID BELOW YOU TAKE THAT DEEP BREATH. THIS IS THE PLACE WE TREASURE THE MOST, WE LIVE FOR THOSE MOMENTS AND ALL THAT FOLLOW.

THE DEMON XL IS OUR ANSWER FOR EVERYONE LOOKING FOR THE WHEELSET TO ACCOMPANY US IN THESE MOMENTS, REGARDLESS OF WHAT COMES NEXT.

- BOOST ONLY FRONT AND REAR HUB
- 30MM INNER WIDTH
- ENDURO PLUS 35MM WIDTH
- TUBELESS READY MICROPEENED RIM PROFILE
- HEAT CURED GRAPHICS ARE LIGHT & CAN WITHSTAND HARD OFF ROAD ABUSE
- BRASS NIPPLES
- DEMON XL 275 SUPER BOOST: 2,110 GRAMS/PAIR
- DEMON XL 29 SUPER BOOST: 2,205 GRAMS/PAIR



CLINCHER



DEMON XL 27.5" SUPER BOOST

XL



DEMON XL 29" SUPER BOOST




CRISP

DESIGN AND PRODUCE A WHEELSET THAT WOULD HOLD UP TO THE ABUSE THESE GUYS THROW AT IT, LOOK RAD AND NOT BREAK THE BANK. ALL NEW SINGLE SPEED SPECIFIC HUB UTILIZING THE INTERNAL STRUCTURE OF OUR HUBS, THIS COMBINATION ALLOWS FOR ALMOST INSTANT ENGAGEMENT TO GET YOU MOVING INTO THE LINE IMMEDIATELY.



CRISP 26"



CLINCHER

- 26MM INNER WIDTH
- EXTERNAL 32MM WIDTH
- TUBELESS READY MICROPEENED RIM PROFILE
- HEAT CURED GRAPHICS ARE LIGHT & CAN WITHSTAND HARD OFF ROAD ABUSE
- BRASS NIPPLES
- CRISP 26: 2,100 GRAMS/PAIR







PARTS

HUBS 2024

NOVATEC IS WELL-KNOWN FOR OUR LIGHT, SOLID SMOOTH ROALLING HUBS, FORM ROAD TO TRACK, CAMPY TO SRAM, NOVATEC AFTERMARKET HUBS SHOULD BE AT THE HEART OF EVERY WHEELSET.




SL-PRO+

-  **A291SB/A-SL**
- ALLOY J-HOOK HUB
-  WEIGHT 60G
- SEALED BEARING 2
-  SPOKE HOLES 20 24 28
- GAUGE 14
-  O.L.D 100
- AXLE 9
- AXLE MATERIAL ALLOY
- P.C.D 30
- F.T.F 68.7







SP-PRO+

-  **AS61CB**
- CARBON STRAIGHT PULL HUB
-  WEIGHT 72G
- SEALED BEARING 2
- SPOKE HOLES 20
- GAUGE 14
- O.L.D 100
- AXLE 9
- AXLE MATERIAL ALLOY
- P.C.D 30.5
- F.T.F 80.4




SP-PRO+

-  **D411CB-12**
- CARBON STRAIGHT PULL DISC HUB
-  WEIGHT 79G
- SEALED BEARING 2
-  SPOKE HOLES 24 28
- GAUGE 14
-  O.L.D 100
- AXLE 12
- AXLE MATERIAL ALLOY
- P.C.D 34
- F.T.F 63.5




SL-PRO+

-  **F482SB/A-SL-11S**
- ALLOY J-HOOK HUB
-  WEIGHT 228G
- SEALED BEARING 4
-  SPOKE HOLES 20 24 28 32
- GAUGE 14
-  O.L.D 130
-  AXLE 10
- AXLE MATERIAL ALLOY
-  P.C.D 41/49
- F.T.F 56.6
- PAWLS 4








SP-PRO+

-  **FS62CB-11S**
- CARBON STRAIGHT PULL HUB
-  WEIGHT 215G
- SEALED BEARING 4
-  SPOKE HOLES 24
- GAUGE 14
- O.L.D 130
-  AXLE 10
- AXLE MATERIAL ALLOY
- P.C.D 34/47
- F.T.F 67.8
- PAWLS 4







SP-PRO+

-  **D412CB-X12-11S**
- CARBON STRAIGHT PULL DISC HUB
-  WEIGHT 229G
- SEALED BEARING 4
-  SPOKE HOLES 24 28
- GAUGE 14
-  O.L.D 142
-  AXLE 12
- AXLE MATERIAL ALLOY
- P.C.D 34/74
- F.T.F 60.8
- PAWLS 4



DIA

SL-TEAM

-  **D791SB-B15**
- ALLOY J-HOOK DISC HUB
-  WEIGHT 170G
- SEALED BEARING 2
-  SPOKE HOLES 24 28 32 36
- GAUGE 14
-  O.L.D 110
- AXLE 15
- AXLE MATERIAL ALLOY
- P.C.D 58/45
- F.T.F 71.2
- CENTER LOCK:
- D791SB-CL-B15
- 15X100: D791SB-15



BLO



DEMON













CRISP











SL-PRO

-  **D902SB-B12-11S**
ALLOY J-HOOK DISC HUB
-  **WEIGHT 370G**
SEALED BEARING 4
-  **SPOKE HOLES 32 36**
-  **GAUGE 13 14**
-  **O.L.D 148**
-  **AXLE 12**
-  **AXLE MATERIAL ALLOY · CRMO**
-  **P.C.D 62**
-  **F.T.F 62.1**
-  **PAWLS 4**
-  **XD DRIVER COMPATIBLE**
- MICRO SPLINE COMPATIBLE**
- CENTER LOCK: D902SB-CL-B12-11S**

SL PRO

-  **XD641SB-B15**
ALLOY J-HOOK DISC HUB
-  **WEIGHT 196G**
SEALED BEARING 2
-  **SPOKE HOLES 32**
-  **GAUGE 14**
-  **O.L.D 110**
-  **AXLE 15**
-  **AXLE MATERIAL ALLOY**
-  **P.C.D 58**
-  **F.T.F 69.5**
-  **OFFSET 5.9**
- 15X100:XD641SB-15**








SL-PRO

-  **DH92SB-A4A-157-MS**
ALLOY J-HOOK DISC HUB
-  **WEIGHT 393G**
SEALED BEARING 4
-  **SPOKE HOLES 32**
-  **GAUGE 14**
-  **O.L.D 150/157**
-  **AXLE 12**
-  **AXLE MATERIAL ALLOY**
-  **P.C.D 44**
-  **F.T.F 71.4**
-  **OFFSET 7.6**
- PAWLS 4**
- XD DRIVER COMPATIBLE**

SL-PRO⁺

-  **XD641SB/A-20**
ALLOY J-HOOK DISC HUB
-  **WEIGHT 192G**
SEALED BEARING 2
-  **SPOKE HOLES 28 32**
-  **GAUGE 14**
-  **O.L.D 110**
-  **AXLE 20**
-  **AXLE MATERIAL ALLOY**
-  **P.C.D 58**
-  **F.T.F 59.5**
-  **OFFSET 5.9**

SL PRO

-  **XD262SB-A6A**
ALLOY J-HOOK DISC HUB
-  **WEIGHT 370G**
SEALED BEARING 4
-  **SPOKE HOLES 32**
-  **GAUGE 14**
-  **O.L.D 135/142**
-  **AXLE 10/12**
-  **AXLE MATERIAL ALLOY**
-  **P.C.D 62**
-  **F.T.F 72.9**
-  **OFFSET 0.7**
- PAWLS 6**
- 9T-DRIVER UNIT COMPATIBLE**


QUICK RELEASE/CASSETTE

ROAD / ROAD DISC

SHIMANO/SRAM/CAMPY COMPATIBLE



MTB SHIMANO COMPATIBLE



SRAM COMPATIBLE



VERSATILE

OUR ROAD CASSETTE BODIES ARE 8, 9, 10 & 11 SPEED COMPATIBLE. SIMPLY INCLUDE THE SPACER FOR 8, 9 & 10 SPEED GEARING & REMOVE IT FOR 11 SPEED GEARING.

EFFICIENT

OUR ALL NEW OFF ROAD CASSETTE FEATURES A NEW 4-PAWL, OFFSET TOOTH DRIVE SYSTEM TO MINIMIZE ANY DRIVE SLACK WHICH CAN COST PRECIOUS SECONDS IN COMPETITION.

ADAPTABLE


NOVATEC CASSETTE BODIES ARE AVAILABLE IN OPTIONS COMPATIBLE WITH 8, 9, 10 AND 11 SPEED CASSETTES FROM SHIMANO AS WELL AS THE LATEST 1X SYSTEMS FROM SRAM.



E440

4 PAWLS WITH 40T 2 SEALED BEARINGS OD17 CASSETTE BODY

NOVATEC'S E440 CASSETTE BODY SYSTEM BOASTS POWERFUL POWER TRANSMISSION PERFORMANCE. OUR 40-TOOTH RATCHET RING PAIRS WITH 4 SETS OF 7MM WIDE PAWLS, ACHIEVING A LARGER CONTACT AREA. THIS DRIVE MECHANISM ENSURES THE STRENGTH AND STABILITY OF THE E440 SYSTEM, ALLOWING FOR DIRECT POWER TRANSMISSION EVEN IN HIGH-POWER E-MTB APPLICATIONS. EVERY WATT OF POWER IS EFFICIENTLY TRANSFERRED TO THE WHEEL THROUGH OUR LIGHTWEIGHT FREEHUB BODY WITH ABG TECHNOLOGY, REDUCING WEAR FROM THE CASSETTE. IT IS THE OPTIMAL CHOICE FOR E-MTB'S AND PROFESSIONAL RIDERS.

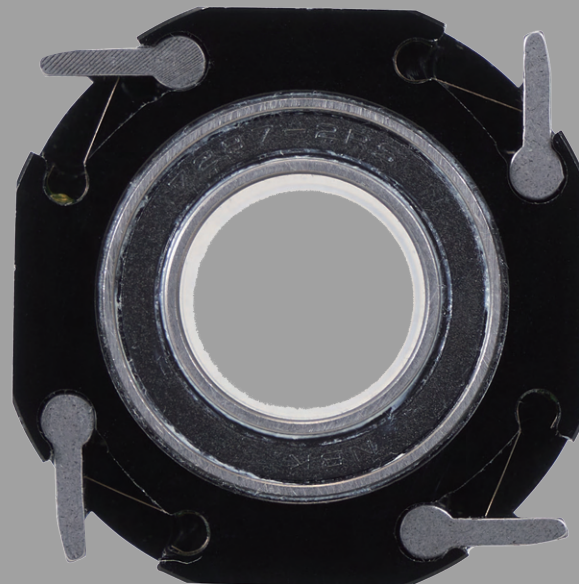

QR249 F40G R45G
QR249 TI F32G R35G



BRAKE PADS

FULL CARBON COMPOUND
SHIMANO & CAMY FITMENTS



BEARING PULLER KIT



BEARING INSTALLER KIT



VALVE EXTENDER

42MM FOR R5
70MM FOR R9



RIM STRIPS

700C/29/275 SIZE
16MM & 18MM WIDTHS




26"
18MM, 21MM
& 24MM WIDTHS



TUBULESS TAPE

21MM/24MM/26MM/28MM



WHEEL AM PACKAGING



TUBULESS VALVE

35MM/44MM



HUB & CASSETTE AM PACKAGING



| SIZE | CUFT | PCS |
|--------|-------|--------|
| 700C | 3.35 | 1 SET |
| 650B | 2.61 | 1 SET |
| 650B+ | 3.43 | 1 SET |
| 650B++ | 4.35 | 1 SET |
| 26 " | 2.53 | 1 SET |
| 700C | 12.63 | 3 SETS |
| 26 " | 10.7 | 3 SETS |

WHEELSET SPECS 2024

| MODEL WEIGHT/PAIR | TYPE | RIM TYPE DEPTH | ETRTO ERD | INNER WIDTH EXTERNAL WIDTH | RIM FINISHING | WEIGHT FRONT / REAR CALCULATED | SPOKES NO. J-HOOK/ STRAIGHT | SPOKES TYPE | SPOKES FRONT L/R (mm) | SPOKES REAR L/R (mm) | LACING FRONT/REAR |
|--|-----------------------------|---------------------------|-----------------|----------------------------|------------------|--------------------------------|-----------------------------|-------------------------|-----------------------|----------------------|-------------------|
| R5 DISC OE(CLIN. U1.0) 1588G | ROAD DISC BRAKE | CLINCHER DISC CARBON 50MM | 622-21 552.6MM* | 21MM/27.7MM | UD | 730G 858G | 24/24 J-HOOK | STAINLESS TRIPLE BUTTED | L:12X264 R:12X266 | R:12X266 R:2X/2X | F:2X/2X R:2X/2X |
| R4 DISC OE(CLIN. U1.0) 1578G | ROAD DISC BRAKE | CLINCHER DISC CARBON 45MM | 622-21 562.6MM* | 21MM/27.9MM | UD | 726G 852G | 24/24 J-HOOK | STAINLESS TRIPLE BUTTED | L:12X269 R:12X271 | R:12X271 R:12X268 | F:2X/2X R:2X/2X |
| R3 DISC OE(CLIN. U1.0) 1521G | ROAD DISC BRAKE | CLINCHER DISC CARBON 35MM | 622-21 582.6MM* | 21MM/27.7MM | UD | 691G 830G | 24/24 J-HOOK | STAINLESS TRIPLE BUTTED | L:12X278 R:12X280 | R:12X279 R:12X277 | F:2X/2X R:2X/2X |
| R3 DISC OCR-CL (CLIN. U1.0) 1500G | ROAD DISC BRAKE | CLINCHER DISC CARBON 35MM | 622-21 582.6MM* | 21MM/27.7MM | UD | 692G 808G | 24/24 STRAIGHT | STAINLESS AERO BUTTED | L:12X286 R:12X286 | L:12X286 R:12X284 | F:2X/2X R:2X/2X |
| R4 DISC -CL (CLIN. U1.0) 1557G | ROAD DISC BRAKE | CLINCHER DISC CARBON 45MM | 622-21 562.6MM* | 21MM/27.9MM | UD | 711G 846G | 24/24 STRAIGHT | STAINLESS AERO BUTTED | L:12X276 R:12X277 | L:12X278 R:12X276 | F:2X/2X R:2X/2X |
| JETFLY (U4.0) 1564G | ROAD RACING/TRAINING | CLINCHER ALLOY 32MM | 622-20 589.2MM* | 20MM/25MM | BLACK MICRO PEEN | 688G 876G | 20/24 J-HOOK | STAINLESS TRIPLE BUTTED | L:10X277 R:10X277 | L:8X268 R:16X283 | F:RADIAL R:1X/3X |
| JETFLY SL (CLIN.U1.0) 1343G | ROAD RACING/TRAINING | CLINCHER ALLOY 23.4MM | 622-17 589.2MM* | 17MM/21.3MM | BLACK MICRO PEEN | 583G 760G | 20/24 J-HOOK | STAINLESS TRIPLE BUTTED | L:10X285 R:10X285 | L:8X284 R:16X291 | F:RADIAL R:1X/3X |
| JETFLY DISC-CL (U4.0) 1714G | ROAD DISC BRAKE | CLINCHER ALLOY 32MM | 622-20 572.1MM* | 24MM/30MM | BLACK MICRO PEEN | 786G 928G | 24/28 J-HOOK | STAINLESS TRIPLE BUTTED | L:12X280 R:12X282 | L:14X288 R:14X276 | F:2X/2X R:2X/2X |
| G24 (U1.0) 1565G | GRAVEL | HOOKLESS CARBON 28MM | 622-24 597.6MM* | 24MM/30MM | UD | 717G 848G | 24/24 J-HOOK | STAINLESS TRIPLE BUTTED | L:12X286 R:12X288 | L:12X288 R:12X285 | F:2X/2X R:2X/2X |
| M30 27.5 ALL MOUNTAIN (U2.0) 1885G | MTB DISC TRAIL | HOOKLESS CARBON 25MM | 584-30 565.6MM | 30MM/37MM | UD | 839G 1046G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X271 R:16X274 | L:16X272 R:16X270 | F:3X/3X R:3X/3X |
| M30 27.5 ENDURO (U2.0) 1935G | MTB DISC TRAIL | HOOKLESS CARBON 25MM | 584-30 565.6MM | 30MM/37MM | UD | 864G 1071G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X274 R:16X271 | L:16X272 R:16X270 | F:3X/3X R:3X/3X |
| M30 29.5 ALL MOUNTAIN (U2.0) 1962G | MTB DISC TRAIL | HOOKLESS CARBON 25MM | 622-30 603.6MM* | 30MM/37MM | UD | 871G 1091G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X290 R:16X293 | L:16X291 R:16X289 | F:3X/3X R:3X/3X |
| M30 29.5 ENDURO (U2.0) 2032G | MTB DISC TRAIL | HOOKLESS CARBON 25MM | 622-30 603.6MM* | 30MM/37MM | UD | 906G 1126G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X290 R:16X293 | L:16X291 R:16X289 | F:3X/3X R:3X/3X |
| FLOWTRAIL 27.5 (U3.1) 1777G | MTB DISC TRAIL | CLINCHER ALLOY 18MM | 584-23 589.2MM | 23MM/27.8MM | BLACK MICRO PEEN | 780G 997G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X275 R:16X279 | L:16X276 R:16X274 | F:3X/3X R:3X/3X |
| FLOWTRAIL 29 (U3.1) 1830G | MTB DISC TRAIL | CLINCHER ALLOY 18MM | 622-23 593.8MM* | 23MM/27.8MM | BLACK MICRO PEEN | 796G 1034G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X294 R:16X298 | L:16X295 R:16X293 | F:3X/3X R:3X/3X |
| DIABLO 27.5 BOOST (U2.1) 1873G | MTB DISC TRAIL | CLINCHER ALLOY 18.5MM | 584-23 589.2MM | 23MM/28.5MM | BLACK MICRO PEEN | 838G 1045G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X274 R:16X278 | L:16X275 R:16X273 | F:3X/3X R:3X/3X |
| DIABLO 29 BOOST (U2.1) 1969G | MTB DISC TRAIL | CLINCHER ALLOY 18.5MM | 622-23 593.8MM* | 23MM/28.5MM | BLACK MICRO PEEN | 882G 1087G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X294 R:16X298 | L:16X295 R:16X293 | F:3X/3X R:3X/3X |
| DIABLO XL 27.5 (U2.0) 2048G | MTB DISC ENDURO | CLINCHER ALLOY 21MM | 584-30 556MM* | 30MM/35MM | BLACK MICRO PEEN | 914G 1134G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X272 R:16X276 | L:16X272 R:16X271 | F:3X/3X R:3X/3X |
| DIABLO XL 29 (U2.0) 2134G | MTB DISC ENDURO SUPER BOOST | CLINCHER ALLOY 21MM | 622-30 593.8MM* | 30MM/35MM | BLACK MICRO PEEN | 963G 1171G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X291 R:16X295 | L:16X291 R:16X290 | F:3X/3X R:3X/3X |
| DEMON XL 27.5 (U2.0)-SUPER BOOST 2110G | MTB DISC SUPER BOOST | CLINCHER ALLOY 21MM | 584-30 556MM* | 30MM/35MM | BLACK MICRO PEEN | 955G 1155G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X269 R:16X270 | L:16X270 R:16X268 | F:3X/3X R:3X/3X |
| DEMON XL 29 (U2.0) SUPER BOOST 2205G | MTB DISC DH BOOST | CLINCHER ALLOY 21MM | 622-30 593.8MM* | 30MM/35MM | BLACK MICRO PEEN | 1005G 1200G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X288 R:16X289 | L:16X289 R:16X287 | F:3X/3X R:3X/3X |
| CRISP 2100G | DIRT JUMP | CLINCHER ALLOY 21MM | 559-26 530.5MM* | 26MM/32MM | BLACK MICRO PEEN | 920G 1180G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16X256 R:16X258 | L:16X257 R:16X257 | F:3X/3X R:3X/3X |
| N25 2216G | GRAVEL | CLINCHER ALLOY 17.5MM | 622-25 613.6MM | 25MM/31MM | BLACK ANODIZING | 1028G 1188G | 32/32 J-HOOK | STAINLESS TRIPLE BUTTED | L:16x 297 R:16x 299 | L:16x299 R:16x297 | F:3X/3X R:3X/3X |

| NIPPLE TYPE | EYELETS / VALVE HOLE | HUBS | HUB FINISHING | AXLE FRONT/REAR | CONVERTIBLE TO TUBELESS | CASSETTE | MATERIAL OF CASS.BODY/COMPATIBILITY | RIM WEIGHT | BEARING SIZE | HUB WEIGHT FRONT / REAR | QUICK RELEASE | PARTS |
|------------------------------|----------------------|------------------------------|---------------------|----------------------------|-------------------------|---------------------|-------------------------------------|------------|-----------------------------------|-------------------------|---------------|---|
| BLACK 16MM DSN ALLOY | NO. Ø6.5MM | D791SB-CL D792SB-CL-X12 | BLACK ANO. POLISHED | AL 12X100 AL 12X142 | YES | SHIM.11/ SRAM /CAMP | ALLOY ABG | 475G | F: # 6902X2 R: # 6902X4 | F: 142G R: 270G | | |
| BLACK 16MM DSN ALLOY | NO. Ø6.5MM | D791SB-CL D792SB-CL-X12 | BLACK ANO. POLISHED | AL 12X100 AL 12X142 | YES | SHIM.11/ SRAM /CAMP | ALLOY ABG | 460G | F: # 6902X2 R: # 6902X4 | F: 142G R: 270G | | |
| BLACK 16MM DSN ALLOY | NO. Ø6.5MM | D791SB-CL D792SB-CL-X12 | BLACK ANO. POLISHED | AL 12X100 AL 12X142 | YES | SHIM.11/ SRAM /CAMP | ALLOY ABG | 430G | F: # 6902X2 R: # 6902X4 | F: 142G R: 270G | | |
| BLACK / 2 RED 16MM DSN ALLOY | NO. Ø6.5MM | D411CB-CL-12 D412CB-CL-X12 | UD FINISHING | AL 12X100 AL 12X142 | YES | SHIM.11/ SRAM /CAMP | ALLOY ABG | 430G | F: # 6803X 2 R: # 15267X4 | F: 83G R: 240G | | VALVE EXTENER, 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 16MM DSN ALLOY | NO. Ø6.5MM | D411CB-CL-12 D412CB-CL-X12 | UD FINISHING | AL 12X100 AL 12X142 | YES | SHIM.11/ SRAM /CAMP | ALLOY ABG | 460G | F: # 6803X 2 R: # 15267X4 | F: 83G R: 240G | | VALVE EXTENER, 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 14MM DSN ALLOY | NO. Ø6.5MM | XA561SB XF562SB | BLACK ANO. POLISHED | AL 9X108X100 AL 10X140X130 | YES | SHIM.11/ SRAM /CAMP | ALLOY ABG | 518G | F: # 689X2 R: # 6802X1 #6902X3 | F: 65G R: 235G | QR249 | 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 14MM DSN ALLOY | NO. Ø6.5MM | XA561SB XF562SB | BLACK ANO. POLISHED | AL 9X108X100 AL 10X140X130 | YES | SHIM.11/ SRAM /CAMP | ALLOY ABG | 385G | F: # 689X2 R: # 6802X1 #6902X3 | F: 65G R: 235G | QR249 | 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 14MM DSN ALLOY | NO. Ø6.5MM | D791SB-CL D792SB-CL-X12 | BLACK ANO. POLISHED | AL 12X100 AL 12X142 | YES | SHIM.11/ SRAM /CAMP | ALLOY ABG | 504G | F: #6902X2 R: #6902X4 | F:144G R:271G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK 16MM DSN ALLOY | NO. Ø6.5MM | D791SB-CL D792SB-CL-X12 | BLACK ANO. POLISHED | AL 12X100 AL 12X142 | YES | SHIM.11/ SRAM /CAMP | ALLOY ABG | 415G | F: #6902X2 R: #6902X4 | F: 142G R: 270G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK 16MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | ALLOY ABG | 455G | F: #6902X2 R: #6903X2 #17287X2 | F:160G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK 16MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | ALLOY ABG | 480G | F: #6902X2 R: #6903X2 #17287X2 | F:160G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK 16MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | ALLOY ABG | 480G | F: #6902X2 R: #6903X2 #17287X2 | F:160G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK 16MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | ALLOY ABG | 515G | F: #6902X2 R: #6903X2 #17287X2 | F:160G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 14MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | ALLOY ABG | 415G | F: #6902X2 R: #6903X2 #17287X2 | F:157G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 14MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | ALLOY ABG | 440G | F: #6902X2 R: #6903X2 #17287X2 | F:157G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 14MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | ALLOY ABG | 440G | F: #6902X2 R: #6903X2 #17287X2 | F:157G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 14MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | ALLOY ABG | 490G | F: #6902X2 R: #6903X2 #17287X2 | F:157G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 14MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | ALLOY ABG | 549G | F: #6804X2 R: #17287X2 #6903X2 | F:157G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK / 2 RED 14MM DSN ALLOY | NO. Ø6.5MM | D791SB-B15 D902SB-B12 | BLACK ANO. POLISHED | AL 15X110 AL 12X148 | YES | SHIM.11 / MS / SRAM | | 584G | F: #6804X2 R: #17287X2 #6903X2 | F:157G R:378G | | 4 SPARE SPOKES AND NIPPLES |
| SILVER 14MM BRASS NIPPLE | NO. Ø6.5MM | XD641SB-B20 DH92SB-12X157 | BLACK ANO. POLISHED | AL 20X110 AL 12X157 | YES | SHIM.11 / MS / SRAM | ALLOY ABG [XD] | 549G | F: #6804X R: #17287X2 #6903X2 | F:187G R:394G | | 4 SPARE SPOKES AND NIPPLES |
| SILVER 14MM BRASS NIPPLE | NO. Ø6.5MM | XD641SB-B20 DH92SB-12X157 | BLACK ANO. POLISHED | AL 20X110 AL 12X157 | YES | SHIM.11 / MS / SRAM | ALLOY ABG [XD] | 584G | F: #6804X2 R: #17287X2 #6903X2 | F:187G R:394G | | 4 SPARE SPOKES AND NIPPLES |
| SILVER 12 MM BRASS NIPPLE | NO. Ø6.3MM | XD641SB XD262SB | BLACK ANO. POLISHED | AL 15X100 AL 10X135 | YES | | | 530G | F: #6804X2 R: #6902X4 | F:185G | | 4 SPARE SPOKES AND NIPPLES |
| BLACK 14MM DSN ALLOY | NO. Ø6.3MM | D041SB-CL-B12 D982TSB-CL-B12 | BLACK ANO. POLISHED | AL 12x110 AL 12x148 | YES | | | 570G | F: #6001x2 R: #15267x1 #6902x1 | F:213G R:376G | | 4 SPARE SPOKES AND NIPPLES |

GLOBAL

NOVATEC



AUSTRALIA WHEELSETS/ HUBS

BICYCLE PARTS WHOLESALE

ADDRESS : 76-80 Micro Circuit, Dandenong,
Vic 3175 Australia

TEL : +61-3-9702 9044

FAX : +61-3-9702 9144

E-MAIL : sales@bicyclepartswholesale.com.au

WEB : www.bicyclepartswholesale.com.au

AUSTRIA (EU) WHEELSETS/ HUBS

MESSINGSCHLAGER GmbH & Co. KG

ADDRESS : Hassbergstrasse 45, D 96148 Baunach,
Germany

TEL : +49-9544 944 445

FAX : +49-9544 944 440

E-MAIL : info@messingschlager.com

WEB : www.novatec.messingschlager.com

ARGENTINA WHEELSETS

FERRARIS SRL

ADDRESS : Piedras 1321/23 (C1140ABC), Buenos Aires,
Argentina

TEL : 54-11-4307-6723

FAX : 54-11-4307-6013

E-MAIL : ventas@ferrarissrl.net

BELGIUM HUBS

Dewo-Europe NV

ADDRESS : Steenstraat 16, 1570 Vollezele, Belgium

TEL : +32 - 54 56 79 81

FAX : +32 - 54 56 70 99

E-MAIL : info@dewo-europe.com

WEB : www.dewo-europe.com



CHILE HUBS/ WHEELSETS

Outside Sports SpA

ADDRESS : Bandera 84, of 309 Santiago CL13100 Chile

TEL : +56931023220

EMAIL : contacto@outsidesports.cl

WEB : www.outsidesports.cl



CHINA WHEELSETS/ HUBS

JOY INDUSTRIAL(SHEN ZHEN) CO., LTD.

ADDRESS : Chuang Ye Road 12, The Third Industrial Zone,
Shui Tian Shi Yan Town, Bao An ShenZhen,
China (518108)

TEL : +86-755-2968 4800

FAX : +86-7552968 4727

E-MAIL : szsales@joy-tech.com.tw

CZECH REP.(EU) HUBS

DEMA Senica,a.s.

ADDRESS : Dlhá 248 905 01 Senica, Slovakia

TEL : +421-34-69 45 226

E-MAIL : sport@dema.bike

WEB : www.dema.bike

**GERMANY (EU) WHEELSETS/ HUBS****MESSINGSCHLAGER GmbH & Co. KG**

ADDRESS : Hassbergstrasse 45, D 96148 Baunach,
Germany

TEL : +49-9544 944 445

FAX : +49-9544 944 440

E-MAIL : info@messingschlager.com

WEB : www.novatec.messingschlager.com

**INDIA HUBS/WHEELSETS****WE SNAP INDIA**

ADDRESS : 816/817, 8th floor, Gera's Imperium Alpha,
behind Eon Free Zone Road, Kharadi, Pune,
Maharashtra 411014

TEL : +91 9769175859

EMAIL : admin@wesnapindia.in

WEB : wesnapindia.in

INDONESIA WHEELSETS**PT BINTANG TIMUR**

ADDRESS : JL. K.H.M MANSYUR NO.223 JEMBATAN LIMA,
TAMBORA, JAKARTA BARAT 11250, INDONESIA

TEL : +6221-6300555

E-MAIL : sales@bintang-timur.com

ISAREL WHEELSETS**MOTOFAN SAHAR 2002 LTD.**

ADDRESS : 17 Arie Regev ST. NATANYA 4250209
ISRAEL

TEL : +972-9-885-6602

WEB : www.moto-ofan.co.il

JAPAN WHEELSETS**YOSHIKAWA MFG. CO., LTD.**

ADDRESS : 4-14-28 Gamo, Koshigaya, Saitama,
343-0838, Japan

TEL : +81-48-990-1735

FAX : +81-48-990-1736

E-MAIL : info@ysb-brake.co.jp

WEB : www.actionsports.co.jp

MACEDONIA HUBS**CYCLO MANIA INT.doo**

ADDRESS : Stjepana Mitrova Ljubiše 12,
21000 Novi Sad, Vojvodina, Serbia

TEL : +381-63-8738255

E-MAIL : cyclomania.int@gmail.com

WEB : www.cyclomania.rs

MALAYSIA WHEELSETS**HUAN SCHEN Sdn. Bhd.**

ADDRESS : No.12, Jalan TIAJ 2/5, Taman Industri Alam Jaya,
Bukit Chera, 42300 Selangor, Malaysia

TEL : +603 6038 6788

FAX : +603 6038 9788

E-MAIL : huanschen@gmail.com or info@huanschen.com.my

WEB : www.huanschen.com.my

MONTENEGRO HUBS**CYCLO MANIA INT.doo**

ADDRESS : Stjepana Mitrova Ljubiše 12, 21000 Novi Sad,
Vojvodina, Serbia

TEL : +381-63-8738255

E-MAIL : cyclomania.int@gmail.com

WEB : www.cyclomania.rs

**PERU WHEEL SETS****DISARVA ASOCIADO S.R.L.**

ADDRESS : Jr. Luna Pizarro 120, La Victoria, Lima, Perú

TEL : +511 332 0533 Anexo 118

E-MAIL : ventas@disarva.com

WEB : www.disarva.com

POLAND (EU) WHEELSETS/ HUBS**SPEEDER**

ADDRESS : Ul. Polna 5, 62-095 Murowana Goslina, Poland

TEL : +48 61 670-4047

E-MAIL : biuro@speeder.com.pl

WEB : www.speeder.com.pl

ROMANIA (EU) HUBS**DHS BIKE PARTS s.r.l.**

ADDRESS : Str.Santuhalm 35A, 330004 Deva City, Romania

TEL : +40-728 285 935

E-MAIL : comenzioline@dhsbikeparts.ro

WEB : www.dhsbikeparts.ro

RUSSIA HUBS**VELOOLIMP**

ADDRESS : Elektrodnyaya Ul., D.2, Str12-14, Moscow,
111524, Russia

TEL/FAX : +7-495-788 1952

E-MAIL : veloolimp@gmail.com/shop@veloolimp.com

WEB : www.veloolimp.com

SERBIA HUBS**CYCLO MANIA INT. doo**

ADDRESS : Stjepana Mitrova Ljubiše 12, 21000 Novi Sad,
Vojvodina, Serbia

TEL : +381-63-8738255

E-MAIL : cyclomania.int@gmail.com

WEB : www.cyclomania.rs

SINGAPORE WHEELSETS/ HUBS**THE PM CYCLES**

ADDRESS : Changi Logistic Center,
19 Loyang Way #03-03,
Singapore 508724

TEL : +65 6962 6982 /

+65 8904 7021

E-MAIL : sales@thepmcycles.com

WEB : www.ThePmCycles.com

**SLOVAKIA(EU) HUBS****DEMA Senica,a.s.**

ADDRESS : Dlhá 248 905 01 Senica, Slovakia

TEL : +421-34-69 45 226

E-MAIL : sport@dema.bike

WEB : www.dema.bike

SOUTH KOREA WHEELSETS/ HUBS**SBI Sports**

Address : B1, 668, Gaepo-ro, Gangnam-gu,
Seoul, Republic of Korea

Tel : +82-02-2088-5580

Fax : +82-070-8224-5580

WEB : www.sbisports.co.kr

UKRAINE HUBS**SPORTSYSTEMS**

ADDRESS : Kiev Region, Pershogo Travnja str.,
49. Novi Petrivci 07354,
Vyshgorod District, Ukraine

TEL : +380-44-585-7035

FAX : +380-44-585 7036

E-MAIL : vtkhoryk@sportsys.com.ua

UNITED KINGDOM HUBS & PARTS**THORN CYCLES LTD**

ADDRESS : 91-93 ST JOHN STREET, TA6 5HX BRIDGWATER,
SOMERSET, GB

TEL : 01278-441500

E-MAIL : SALES@SJCYCLES.COM

WEB : WWW.SJCYCLES.CO.UK

**URUGUAY WHEELSETS/HUBS****Alkeus S.A.**

ADDRESS : Rondeau 1847, Uruguay

TEL : +598 2924 9695

E-MAIL : contacto@scott-montevideo.com.uy

WEB : www.scott-montevideo.com.uy

**USA WHEELSETS/ HUBS****BIKE FETTISH**

ADDRESS : 41083 Sandalwood Cir. Unit K Murrieta, CA 92562

TEL : +1 (951) 817-7741

E-MAIL : sales@bikefettish.com

WEB : www.bikefettish.com

**VENEZUELA HUB/WHEELSET****BTW VENEZUELA,C.A.**

ADDRESS : AV. LIBERTADOR CRUCE CON CALLE BOLIVAR,
VALLE DE LA PASCUA, ESTADO GUARICO,
VENEZUELA

TEL : +58-4128022258

E-MAIL : btwvenezuela2021@gmail.com

CRF





THOMAS GENON P01

CTM RACING TEAM MEDIA P02 P20 P27 P30 P42

HRINKOW ADVARICS CYCLEANG TEAM (COVER) P02 P04 P05

P07 P08 P09 P11 P14 P16 P18

DAN SHENG-SHAN CHIANG P23 PHOTO BY KASEY CARAMES / ROBERT LOWE

LUKAS KNOPF P31 PHOTO BY VISUALIZE_PRODUCTIONS

MAXIME PEYTHIEU P26

AMERICA

NOVATEC WHEELS US, INC.

1164 OLD 441 N. CLAYTON,
GA. 30525

U.S.A.

CUSTOMERSERVICE@NOVATECUSA.NET

T: +1 706 408 0139

US-



EUROPE

NOVATEC EU S.R.O

SADOVA 2719/3C

905 01 SENICA

SLOVAKIA

INFO@NOVATECWHEELS.EU

T: +421 948 729 699

EU-



ASIA

NOVATEC TAIWAN(HQ)

NO.508, SEC. 4,

CHANGPING ROAD, DAYA DIST.,

TAICHUNG CITY, TAIWAN 42850

SERVICE@NOVATECWHEELS.COM

T: +886 4 2568 7150

TW-



NOVATECWHEELS SHENZHEN

NO.12 CHUANGYE ROAD

THE 3RD INDUSTRIAL ZONE

SHUITIAN VILLAGE, SHIYA TOWN

BAOAN SHENZHEN, CHINA 518108

SZSALES@JOY-TECH.COM.TW

T: +86 755 2968 4588

CH-WECHAT-

